



Queue management systems




ENTRY LEVEL LINE



EASYTURN kit include:

- n° 1 MD2 2-digit display board
- n° 1 TX RF remote control 433.92 Mhz.
- n° 1 DISPENSER Ticket dispenser
- n° 1 TKS2000 2.000 tickets roll
- n° 1 CART Instruction sign

Kit items
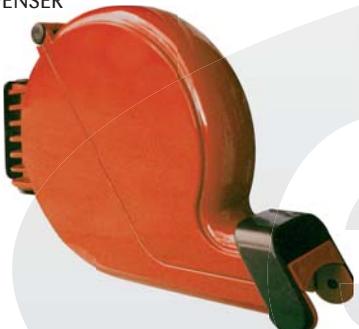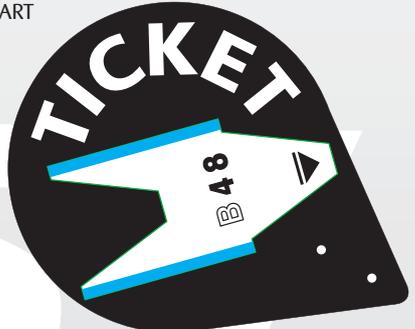
<p>MD2</p> 	<p>TX</p> 	
<p>DISPENSER</p> 	<p>TKS2000</p> 	<p>CART</p> 



MD2 - 2 digit electronic display board with segment LEDs for indicating the sequential turn number. It is made of plastic and aluminium and comes with a swivel bracket for wall mounting. It includes a buzzer, blinking digit and reset functions. All MD2 display boards can be linked together to show the same turn number.

ABS/aluminium enclosure	color	black
Dimensions	mm	300x200x45
Height of digit	mm	100
Consumption	W	6
Visual angle		150°
Operating temperature	°C	0°/50°
External power supply	Vcc	12/500 mA



MD3 - 3-digit electronic display board with segment LEDs for indicating the sequential turn number. It is made of plastic and aluminium and comes with a swivel bracket for wall mounting. It includes a buzzer, blinking digit and reset functions. All MD3 display boards can be linked together to display the same turn number.

ABS/aluminium enclosure	color	black
Dimensions	mm	390x200x45
Height of digit	mm	100
Consumption	W	9
Visual angle		150°
Operating temperature	°C	0°/50°
External power supply	Vcc	12/1250 mA




TX - Quartz remote control set at the standard frequency of 433.92 MHz. It has a red button for normal or fast advancing of the number sequence (NEXT), a button for coding the transmission channel (C) and a confirmation LED. The range is 20 m.


ABS enclosure	color	black
Dimensions	mm	95x57x23
Operating temperature	°C	0°/50°
Average life battery	months	6
Battery type	V	12



TKS20000 - Package containing 10 rolls of 2,000 tickets each. The tickets may have a letter + 2-digit number (A23) or 3-digit number (023). Available in 5 different colours.

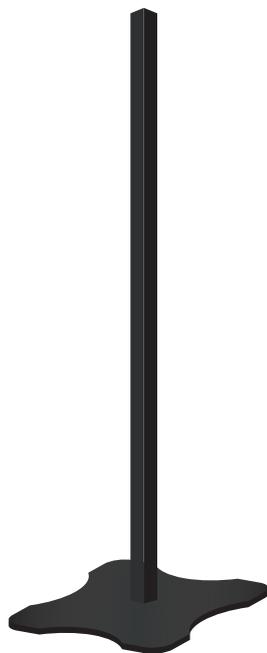

PIANTANA - Black floor stand for ticket dispenser, height 130 cm. above floor level. It comprises a square 36x36x5 cm. cast iron base and metal upright complete with accessories for assembly. Total weight 8 Kg.



CART - Screen-printed PVC customer instruction sign indicating "TICKET", complete with holes for fastening to the wall or floor stand.

PVC	color	black
Dimensions	mm	300x250



DISPENSER - Ticket dispenser made of red shockproof plastic. It is supplied complete with a bracket for mounting on the wall or floor stand.

ABS enclosure	color	red
Dimensions	mm	260x180x50



VOICE - The VOICE module is composed by a main unit with loudspeaker and is connectable to all MD2 (VOICE2) and MD3 (VOICE3) displays. It's provided with a wide range of pre-recorded messages in digital audio (mp3). For big surfaces is provided with a low frequency output socket for connection to external audio sources. Remove the red carter to access a dip-switch for message settings (see AVAILABLE MESSAGES);



ABS enclosure	color	black/red
Dimensions	mm	115x75x40
Power	W	6
Operating temperature	°C	0°/50°
External power supply	Vcc	12/1250 mA



CONS2 - Calling console for operators. It includes a numerical keyboard with digits from 0 to 9, two buttons for moving to the next and previous numbers (+ and -). It is configured for connection to the MD2 display board via a 6-pole telephone flat cable.

ABS enclosure	color	black
Dimensions	mm	105x87x32
Height of digit	mm	14
Visual angle		150°
Operating temperature	°C	0°/50°
Power supply	Vcc	5
Consumption	mA	250




CONS3 - Calling console for operators. It includes a numerical keyboard with digits from 0 to 9, two buttons for moving to the next and previous numbers (+ and -). It is configured for connection to the MD3 display board via a 6-pole telephone flat cable.

ABS enclosure	color	black
Dimensions	mm	105x87x32
Height of digit	mm	14
Visual angle		150°
Operating temperature	°C	0°/50°
Power supply	Vcc	5
Consumption	mA	250

Below a short description of VOICE connections and features:

- (A) 12VCC: Output socket for external power supply adaptor.
- (B) COM: Output standard socket for connection to display;
- (C) VOLUME: Volume +/- keys to set the desired volume with vocal level indication (1 up to 10);
- (D) OUT B.F.: Low frequency output socket for the connection to external audio sources like amplifier, amplified PC audio system, central audio systems, etc.;
- (E) OUT: Socket for connection of the LOUDSPEAKER unit;



Available messages

Grocery	Rotisserie
Delicatessen	Pizza and desserts
Salami and Cheese	Ice cream
Fish	Fruit and vegetables
Bakery	Number
Confectionary	Customer number
Butcher	Patient number
Pastry	Admittance number
Pizzas	Reservation number

www.visel.it

